

やや硬い浅型のキャップ

# 詰め栓




■材質・色

ポリエチレン・白濁色

■出荷単位


100個



■品番の選定

口径一塞ぎたい穴=+0.5mm程度までになる詰め栓が最適です。

例：穴径φ10の場合 → 最適径φ10.5 TC10-4

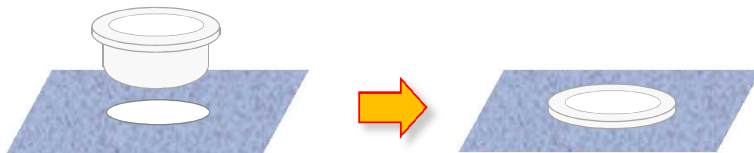

■このような個所に

●穴にはめる



●メネジにはめる



●パイプにはめる



●六角穴にはめる



適用 穴径	品番	寸法		
		口径	ツバ径	高さ
φ3 ∩	TC 3-5	3.9	6.8	5.0
	TC 5-2	5.1	8.5	6.9
	TC 5-3	5.5	9.5	5.0
	TC 5-4	5.8	9.7	6.9
	TC 6-1	6.0	8.4	6.0
	TC 6-3	6.3	9.6	6.0
	TC 6-4	6.5	9.7	6.0
	TC 6-6	6.7	10.7	6.6
	TC 7-1	7.0	10.9	6.5
	TC 7-2	7.4	10.0	7.8
	TC 8-1	8.0	12.0	5.5
	TC 8-2	8.5	12.5	6.0
	TC 8-3	8.9	11.6	8.1
	TC 9-1	9.0	10.5	8.6
	TC 9-2	9.2	13.0	10.5
	TC 9-3	9.4	12.7	9.6
	TC 9-4	9.6	12.8	8.2
	TC 9-7	9.9	12.7	10.5
φ10 ∩	TC10-1	10.3	13.7	8.2
	TC10-4	10.5	14.7	7.2
	TC10-5	10.9	14.0	7.9
	TC11-3	11.6	15.0	7.7
	TC11-4	11.8	15.0	8.5
	TC12-1	12.4	15.0	8.5
	TC13-1	13.0	16.0	9.0
	TC13-2	13.3	15.7	9.9
	TC13-3	13.5	16.2	7.9
	TC13-4	13.7	16.9	8.2
	TC14-2	14.2	17.3	7.8
	TC14-5	14.6	17.4	8.0
	TC15-1	15.0	17.6	7.8
	TC15-3	15.6	19.4	9.9
	TC15-4	15.9	19.4	9.6
	TC16-1	16.1	19.3	9.6
	TC16-2	16.5	20.0	8.6
	TC17-1	17.2	22.4	8.0

適用 穴径	品番	寸法			
		口径	ツバ径	高さ	
φ10 ∩	TC17-2	17.4	22.5	8.6	
	TC17-7	17.9	21.0	9.1	
	TC18-1	18.3	21.7	8.9	
	TC18-4	18.7	22.6	9.0	
	TC18-5	18.8	22.5	8.7	
	TC19-2	19.2	23.9	6.8	
	TC19-5	19.9	24.1	8.8	
	φ20 ∩	TC20-1	20.5	24.4	8.9
		TC21-1	21.0	25.0	9.0
		TC21-2	21.5	24.3	8.8
		TC21-3	21.8	26.3	6.9
		TC22-1	22.0	26.6	9.8
		TC22-4	22.3	28.0	11.3
		TC23-1	23.0	27.2	7.0
		TC23-2	23.5	27.5	9.0
		TC23-3	24.0	28.1	7.0
		TC24-1	24.3	28.8	7.7
		TC24-2	24.5	28.8	7.7
TC24-3		24.8	30.0	10.3	
TC25-1		25.0	29.3	6.5	
TC25-2		25.6	29.4	6.6	
TC26-1		26.0	31.7	9.3	
TC26-3		26.3	30.7	6.9	
TC26-6		26.8	32.2	7.4	
TC27-1		27.4	31.9	7.2	
TC28-1	28.2	31.9	7.4		
TC29-1	29.0	33.0	10.0		
TC29-2	29.4	33.2	9.0		
TC29-3	29.8	35.3	8.9		
φ30 ∩	TC30-1	30.1	37.1	7.1	
	TC31-1	31.0	37.6	6.9	
	TC31-2	31.4	36.6	9.0	
	TC32-2	32.1	36.6	9.1	
	TC32-3	32.5	37.0	11.0	
	TC33-1	33.3	37.2	8.8	
	TC35-1	35.1	40.2	9.0	

適用 穴径	品番	寸法			
		口径	ツバ径	高さ	
φ30 ∩	TC 35-2	35.7	38.2	8.9	
	TC 36-1	36.0	44.2	9.0	
	TC 36-2	36.6	44.0	8.9	
	TC 37-1	37.8	42.5	9.3	
	TC 38-1	38.1	42.3	9.5	
	TC 39-1	39.2	44.0	10.3	
	TC 39-2	39.6	44.3	9.1	
	φ40 ∩	TC 40-1	40.7	47.5	8.7
		TC 41-2	41.6	48.8	9.0
		TC 42-1	42.0	46.2	9.0
		TC 42-2	42.6	46.4	5.8
		TC 43-1	43.2	49.5	8.7
TC 43-2		43.7	49.9	8.7	
TC 44-1		44.2	49.0	16.2	
TC 45-1		45.4	52.1	8.0	
φ50 ∩	TC 46-1	46.4	50.8	8.0	
	TC 47-0	47.0	52.0	10.0	
	TC 47-1	47.4	52.6	8.3	
	TC 51-0	51.1	60.0	10.2	
	TC 51-1	51.8	58.4	14.3	
	TC 52-3	52.6	58.1	9.2	
φ60 ∩	TC 56-2	56.7	65.6	13.5	
	TC 58-1	58.2	67.0	8.7	
	TC 59-1	59.7	64.0	7.7	
	TC 60-1	60.4	64.5	9.5	
	TC 61-1	61.9	67.2	7.0	
φ70 ∩	TC 64-1	64.6	69.2	9.2	
	TC 66-1	66.2	75.2	8.7	
	TC 72-1	72.7	77.9	7.2	
	TC 73-1	73.6	82.5	8.7	
φ80 ∩	TC 74-1	74.2	78.9	7.6	
	TC 81-1	81.2	90.2	8.7	
	TC 85-1	85.1	93.8	8.7	
TC101-1	101.8	113.8	9.0		



商品に関するお問い合わせ ご注文は

TEL 053-433-5211 FAX 053-433-5212 E-mail main@takene.co.jp

〒431-3114 静岡県浜松市東区横志町255

ホームページ [Takene](#)

検索


■品番対応表

●メネジにはめる

メートルネジ		候補詰め栓	
呼び	下穴	品番	口径
M 3	2.5	なし	
M 4	3.4	なし	
M 5	4.3	TC 5-2	5.1
M 6	5.1	TC 5-4	5.8
M 8	6.9	TC 7-2	7.4
M10	8.6	TC 8-3	8.9
M12	10.4	TC10-5	10.9
M14	12.2	TC12-1	12.4
M16	14.2	TC14-5	14.6
M18	15.7	TC16-1	16.1
M20	17.7	TC18-1	18.3
M22	19.7	TC20-1	20.5
M24	21.2	TC21-3	21.8
M27	24.2	TC24-3	24.8
M30	26.6	TC27-1	27.4
M33	29.6	TC29-3	29.8
M36	32.1	TC32-3	32.5
M39	35.1	TC35-2	35.7
M42	37.6	TC37-1	37.8
M45	40.6	TC41-2	41.6
M48	43.1	TC43-2	43.7
M56	50.6	TC51-0	51.1

ウィットネジ		候補詰め栓	
呼び	下穴	品番	口径
W1/ 4	5.1	TC 5-4	5.8
W5/16	6.6	TC 7-1	7.0
W3/ 8	8.0	TC 8-3	8.9
W7/16	9.4	TC 9-4	9.6
W1/ 2	10.7	TC10-5	10.9
W5/ 8	13.7	TC14-2	14.2
W3/ 4	16.7	TC17-2	17.4
W7/ 8	19.5	TC20-1	20.5
W1"	22.4	TC23-1	23.0


管用ネジ		候補詰め栓	
呼び	下穴	品番	口径
Rc1/8	8.5	TC 8-2	8.5
Rc1/4	11.4	TC11-3	11.6
Rc3/8	14.9	TC15-1	15.0
Rc1/2	18.5	TC18-5	18.5

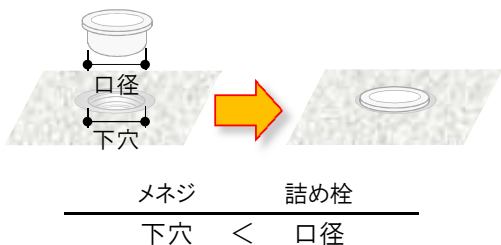

●パイプにはめる

パイプ				候補詰め栓		
呼び	外径	肉厚	内径	品番	つば径	口径
6A	10.5	2.0	6.5	TC 6-6	10.7	6.7
8A	13.8	2.3	9.2	TC 9-3	12.7	9.4
10A	17.3	2.3	12.7	TC13-1	16.0	13.0
15A	21.7	2.8	16.1	TC16-2	20.0	16.5
20A	27.2	2.8	21.6	TC21-3	26.2	21.8
25A	34.0	3.2	27.6	TC28-1	31.9	28.2
32A	42.7	3.5	35.7	TC36-1	44.2	36.0
40A	48.6	3.5	41.6	TC42-1	46.2	42.0
50A	60.5	3.8	52.9	なし		
65A	76.3	4.2	67.9	なし		
80A	89.1	4.2	80.7	TC81-1	90.2	81.2

※肉厚が変わると、該当品番も変わります

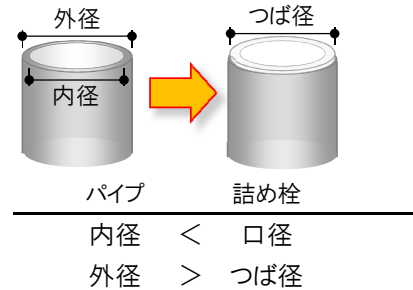

●六角穴にはめる

六角穴付きボルトボルト			候補詰め栓		
呼び	頭径	二面幅	品番	つば径	口径
M 8	13.0	6.0	TC 6-4	9.7	6.5
M10	16.0	8.0	TC 8-2	12.5	8.5
M12	18.0	10.0	TC10-4	14.7	10.5
M14	21.0	12.0	TC12-1	15.0	12.4
M16	24.0	14.0	TC14-5	17.4	14.6
M18	27.0	14.0	TC14-5	17.4	14.6
M20	30.0	17.0	TC17-2	22.5	17.4
M22	33.0	17.0	TC17-2	22.5	17.4
M24	36.0	19.0	TC19-5	24.1	19.9
M27	40.0	19.0	TC19-5	24.1	19.9
M30	45.0	22.0	TC22-4	28.0	22.3
M33	50.0	24.0	TC24-2	28.8	24.5

